




Product Type: High Current Branch Terminal

Product Name:SPDB35-16-
6×16-XX-0001

Product Description: Connection method:Screw connection,IEC Rated Current:125A,IEC Rated Voltage:690V,Number of connections:8,Number of levels:1

Product Size

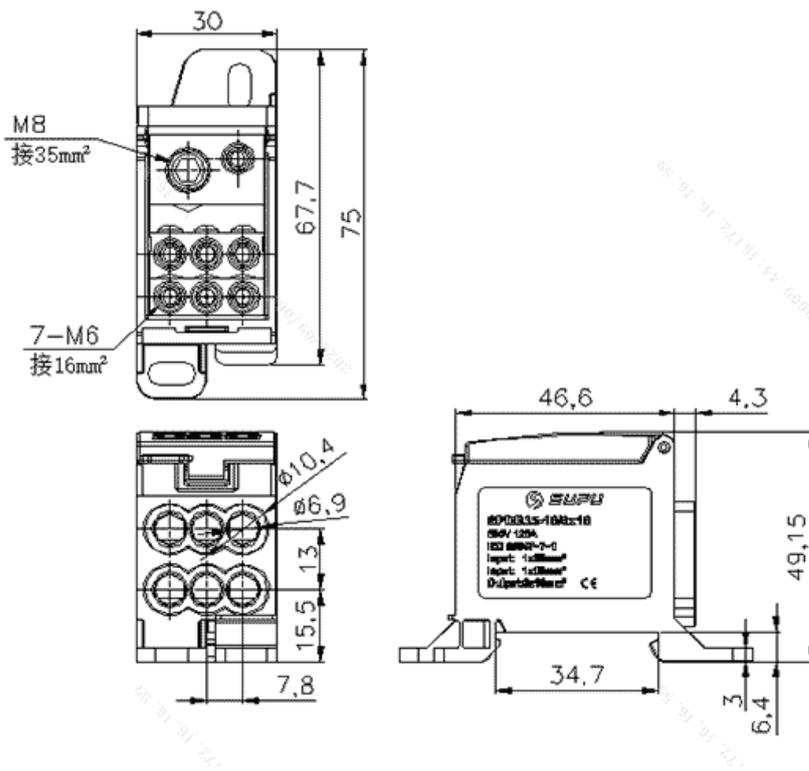

Parameters

<input checked="" type="checkbox"/> SUPU ID	SPDB35-16-6x16-XX-0001
<input checked="" type="checkbox"/> Width	30mm
<input checked="" type="checkbox"/> Number of connections	8

<input type="checkbox"/> Connection method	Screw connection
<input type="checkbox"/> Protection Level	IP20
<input type="checkbox"/> Insulation material	PA66
<input type="checkbox"/> Insulation material group	I
<input type="checkbox"/> Contact material	Copper alloy
<input type="checkbox"/> Contact plating	Sn,Plated
<input type="checkbox"/> Ambient temperature (operation)	-40°C~105°C
<input type="checkbox"/> Ambient temperature (assembly)	-5°C~70°C
<input type="checkbox"/> Ambient temperature (storage)	-25°C~60°C
<input type="checkbox"/> Permissible humidity (storage/transport)	30%~70%

Technical data

<input type="checkbox"/> IEC Rated Current	125A
<input type="checkbox"/> IEC Rated Voltage	690V
<input type="checkbox"/> Degree of pollution	3
<input type="checkbox"/> Rated impulse voltage	2.5KV
<input type="checkbox"/> Locking screw Specification	M6/M8
<input type="checkbox"/> Locking screw torque	3N·m/5N·m
<input type="checkbox"/> Stripping length	9-12mm/10-12mm/14-15mm
<input type="checkbox"/> Connection capacity AWG	2.5-16mm ² /6-16mm ² /10-35mm ²
<input type="checkbox"/> 短路电流 (峰值)	30
<input type="checkbox"/> 短路电流>1S	4.2

Commercial data

Ningbo SUPU Electronics Co., Ltd.

Address: No. 150, Xinxing 4th Road, High-tech Industrial Development Zone,
Cixi City, Zhejiang Province, China


Zip code: 315303

Switchboard: +86 574-63288158

Fax: +86 574-63288170

E-mail:supucontact@supu.cn

Service Hotline: 400-626-6336

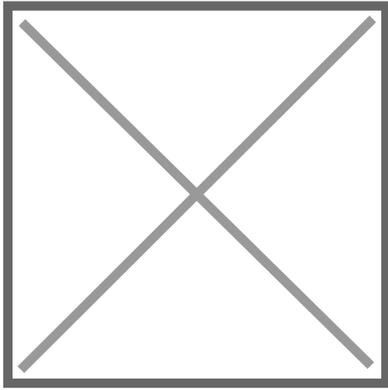

Wechat