




Product Type: Distributor

Product Name: M12A5M-YU-
12A5F-12A5F

Product Description: 60V AC/DC, 4A

Product Size

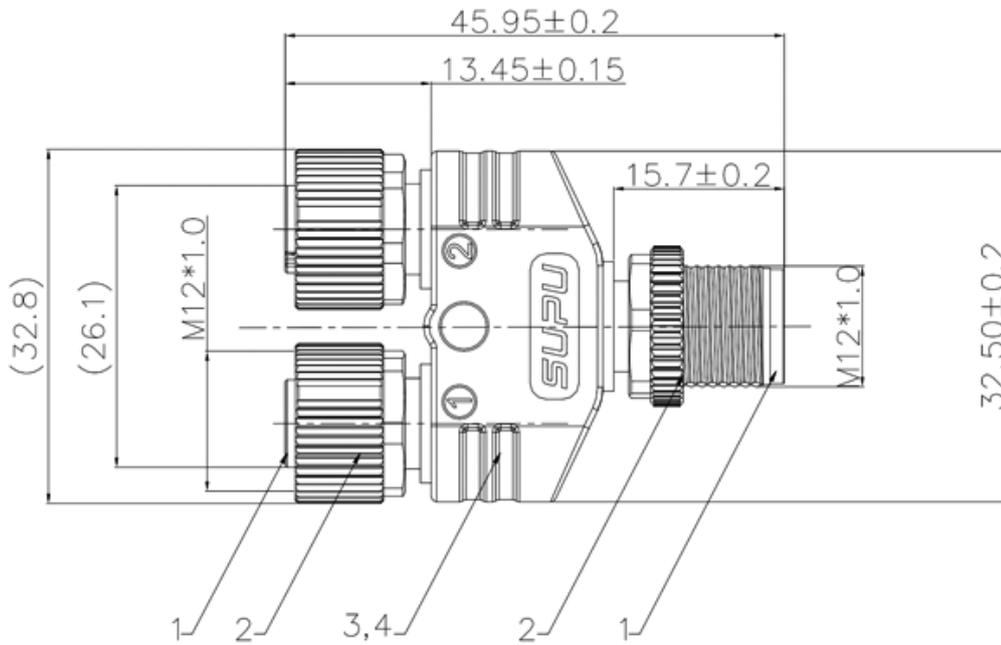

Parameters

| | |
|-------------------------------|-----------------------|
| ☞ SUPU ID | M12A5M-YU-12A5F-12A5F |
| ☞ Number of connections | 5 |
| ☞ Protection Level | IP67 |
| ☞ Operating temperature range | -40~85°C |

| | |
|------------------------|----------------|
| ☞ Thread type | M12 |
| ☞ Category | Pin/Hole |
| ☞ Coding | A-coding |
| ☞ Shielded | No |
| ☞ Mechanical endurance | ≥100 |
| ☞ Standards | IEC61076-2-104 |

Technical data

| | |
|----------------------------|------------|
| ☞ IEC Rated Current | 4A |
| ☞ IEC Rated Voltage | 60V AC/DC |
| ☞ Degree of pollution | 3 |
| ☞ Insulation Resistance | ≥100MΩ |
| ☞ Contact resistance | <10mΩ |
| ☞ Contact/surface material | CuSn/Ni/Au |
| ☞ Contact carrier material | TPU |
| ☞ Screw/nut material | Zinc |
| ☞ Sealing material | NBR |

Ningbo SUPU Electronics Co., Ltd.

Address: No. 150, Xinxing 4th Road, High-tech Industrial Development Zone,

Cixi City, Zhejiang Province, China

Zip code: 315303

Switchboard: +86 574-63288158

Fax: +86 574-63288170

E-mail:supucontact@supu.cn

Service Hotline: 400-626-6336



Wechat

Date:2026-04-28 23:14

The right to modify data belongs to SUPU.