




Product Type: Din rail power supply

Product Name: SDD-24DC2-20

Product Description: Dual channel 24V input, support 1+1 and N+1 redundancy system, output current up to 20A

Product Size

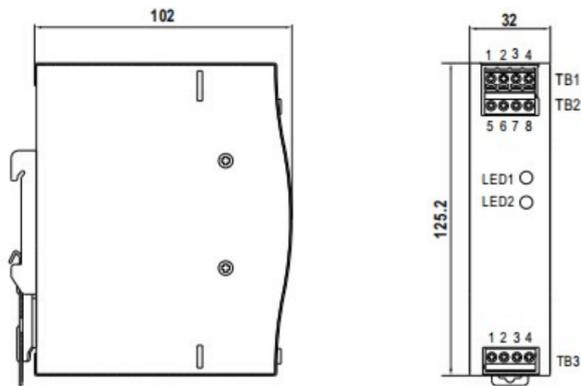

Parameters

⌘ SUPU ID

SDD-24DC2-20

⌘ Protection Level

IP20

⌘ Operating temperature range

-40~+80°C

☞ Terminal block	MC-TD5.08H03C-0001 MC-5.08A04C
☞ DC OK	Yes
☞ Dimensions(mm)	125.2*32*102

Technical data

☞ IEC Rated Current	0-20A continue
☞ IEC Rated Voltage	DC : 24V
☞ Nominal input	DC
☞ Efficiency	98%
☞ Ripple noise	","
☞ Input frequency	","IP/OP-Housings:0.5KVac;

Commercial data

☞ Order No	SDD-24DC2-20
☞ Packing unit	PCS
☞ Minimum order quantity	1
☞ Single piece weight	0.35KG

Ningbo SUPU Electronics Co., Ltd.

Address: No. 150, Xinxing 4th Road, High-tech Industrial Development Zone,

Cixi City, Zhejiang Province, China

Zip code: 315303

Switchboard: +86 574-63288158

Fax: +86 574-63288170

E-mail:supucontact@supu.cn

Service Hotline: 400-626-6336



Wechat

Date:2026-04-28 23:13

The right to modify data belongs to SUPU.