


Product Type: Transformer terminal

**Product Name:620421**

Product Description: Rated Voltage : 600V Rated  
Current:32A Connection method : Screw  
connection colour : grey

## Product Size

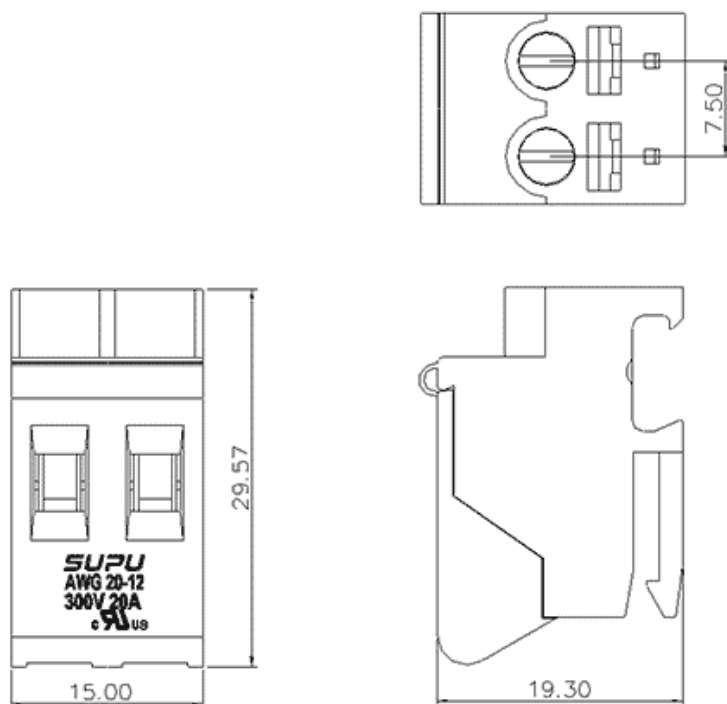

## Parameters

|                         |              |
|-------------------------|--------------|
| ⌘ SUPU ID               | 620421       |
| ⌘ Pitch                 | -            |
| ⌘ Number of levels      | single layer |
| ⌘ Number of connections | 2            |

|                               |                  |
|-------------------------------|------------------|
| ☞ Connection method           | Screw connection |
| ☞ Protection Level            | IP20             |
| ☞ Operating temperature range | -40~+105°C       |
| ☞ Insulation material         | PA66             |
| ☞ Insulation material group   | I                |
| ☞ Contact material            | Copper alloy     |
| ☞ Contact plating             | Sn plated        |
| ☞ Color                       | Grey             |

## Technical data

|                                                 |                      |
|-------------------------------------------------|----------------------|
| ☞ IEC Rated Current                             | 32A                  |
| ☞ IEC Rated Voltage                             | 600V                 |
| ☞ Overvoltage category                          | III/III/ II          |
| ☞ Degree of pollution                           | 3 2 2                |
| ☞ Rated impulse voltage                         | 3KV - -              |
| ☞ UL Rated Current                              | 20A 20A -            |
| ☞ UL Rated Voltage                              | 300V 300V -          |
| ☞ Conductor cross section rigid                 | 0.5-4mm <sup>2</sup> |
| ☞ Conductor cross section flexible              | 0.5-4mm <sup>2</sup> |
| ☞ Conductor cross section flexible,with furrule | 0.5-4mm <sup>2</sup> |
| ☞ Locking screw Specification                   | M3.5                 |
| ☞ Locking screw torque                          | 0.8-0.96N.m          |
| ☞ Fixed Screw Specification                     | -                    |
| ☞ Stripping length                              | 8~9mm                |

## Ningbo SUPU Electronics Co., Ltd.

Address: No. 150, Xinxing 4th Road, High-tech Industrial Development Zone,  
Cixi City, Zhejiang Province, China

Zip code: 315303

Switchboard: +86 574-63288158

Fax: +86 574-63288170

E-mail:supucontact@supu.cn

Service Hotline: 400-626-6336



Wechat