

Product Type: Plug-in terminal-Socket




Product Name:MC-DPG3.5V46-F-3500

Product Description: Pitch:3.5mm Rated

Voltage : 125V Rated Current:10A

colour : customizable

Product Size

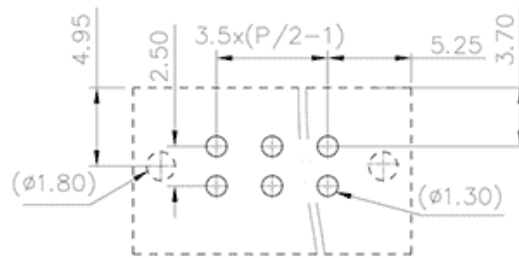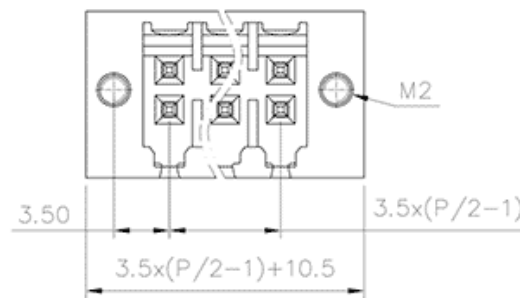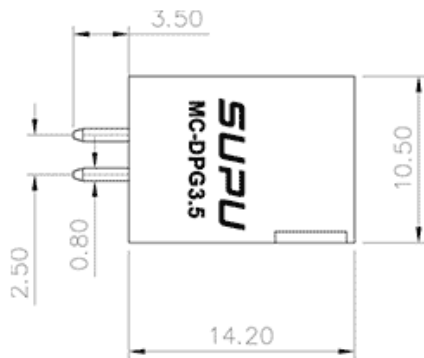

PCB LAYOUT

Parameters

| | |
|---|---------------------|
| <input checked="" type="checkbox"/> SUPU ID | MC-DPG3.5V46-F-3500 |
| <input checked="" type="checkbox"/> Pitch | 3.5 |
| <input checked="" type="checkbox"/> Number of levels | double-layer |
| <input checked="" type="checkbox"/> Number of connections | 46 |

| | |
|--|----------------------------------|
| <input type="checkbox"/> Connection method | - |
| <input type="checkbox"/> Protection Level | IP20 |
| <input type="checkbox"/> Operating temperature range | -40~+105°C |
| <input type="checkbox"/> Insulation material | PA66 |
| <input type="checkbox"/> Insulation material group | I |
| <input type="checkbox"/> Contact material | Copper alloy |
| <input type="checkbox"/> Contact plating | Sn,Plated |
| <input type="checkbox"/> Color | Green/Black/Blue/Grey/Orange/Red |

Technical data

| | |
|--|-------------------|
| <input type="checkbox"/> IEC Rated Current | 125V |
| <input type="checkbox"/> IEC Rated Voltage | 10A |
| <input type="checkbox"/> Overvoltage category | III III II |
| <input type="checkbox"/> Degree of pollution | 3 2 2 |
| <input type="checkbox"/> Rated impulse voltage | 2.5KV 2.5KV 2.5KV |
| <input type="checkbox"/> UL Rated Current | 10A -- |
| <input type="checkbox"/> UL Rated Voltage | 150V -- |
| <input type="checkbox"/> Conductor cross section rigid | - |
| <input type="checkbox"/> Conductor cross section flexible | - |
| <input type="checkbox"/> Conductor cross section flexible,with ferrule | - |
| <input type="checkbox"/> Locking screw Specification | - |
| <input type="checkbox"/> Locking screw torque | - |
| <input type="checkbox"/> Fixed Screw Specification | - |
| <input type="checkbox"/> 固定螺钉扭矩 | - |

| | |
|--|-------|
| <input type="checkbox"/> Stripping length | - |
| <input type="checkbox"/> Use group | B/C/D |
| <input type="checkbox"/> Rated cross section | - |

Commercial data

| | |
|-----------------------------------|---------------------|
| <input type="checkbox"/> Order No | MC-DPG3.5V46-F-3500 |
|-----------------------------------|---------------------|

Ningbo SUPU Electronics Co., Ltd.

Address: No. 150, Xinxing 4th Road, High-tech Industrial Development Zone,

Cixi City, Zhejiang Province, China

Zip code: 315303

Switchboard: +86 574-63288158

Fax: +86 574-63288170

E-mail:supucontact@supu.cn

Service Hotline: 400-626-6336



Wechat