


Product Type: Push-in spring terminal

## Product Name:TPIO2.5-IN-3-LR24

Product Description: Connection method:Push in connection,IEC Rated Current:20A,IEC Rated Voltage:250V,Number of connections:2,Number of levels : 1,Rated cross section:24-12AWG

### Product Size

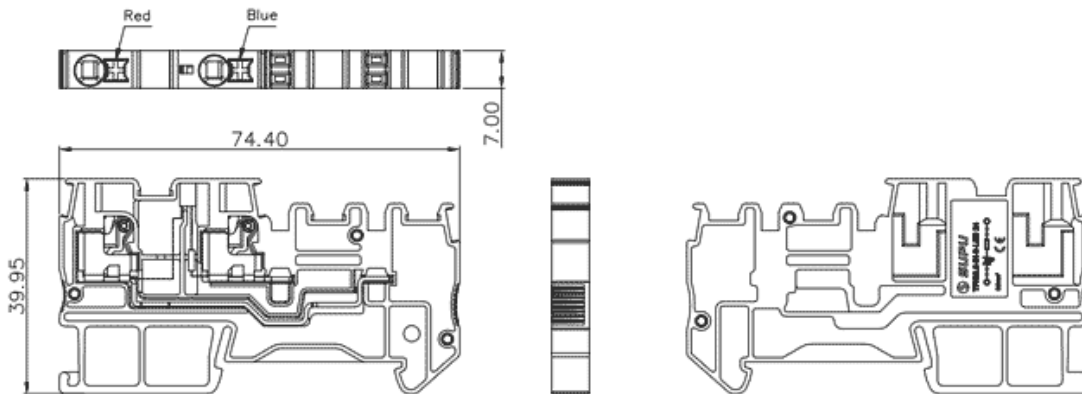

### Parameters

⌘ SUPU ID	TPIO2.5-IN-3-LR24
⌘ Width	7mm
⌘ Number of levels	1
⌘ Number of connections	2

☞ Connection method	直插弹簧接线
☞ Protection Level	IP20
☞ Insulation material	PA66
☞ Insulation material group	I
☞ Contact material	Copper alloy
☞ Contact plating	Sn,Plated
☞ Ambient temperature (operation)	-40°C~105°C
☞ Ambient temperature (assembly)	-5°C~70°C
☞ Ambient temperature (storage)	-25°C~60°C
☞ Permissible humidity (storage/transport)	30%~70%

## Technical data

☞ IEC Rated Current	20A
☞ IEC Rated Voltage	250V
☞ Overvoltage category	III
☞ Degree of pollution	3
☞ Rated impulse voltage	4KV
☞ UL Rated Current	10/16/10A
☞ UL Rated Voltage	300/150/300V
☞ Conductor cross section rigid	0.2-4mm <sup>2</sup>
☞ Conductor cross section flexible	0.2-2.5mm <sup>2</sup>
☞ Conductor cross section flexible,with ferrule	0.2-2.5mm <sup>2</sup>
☞ Stripping length	8-10mm
☞ Use group	B/C/D

Commercial data

☞ Order No

TPIO2.5-IN-3-LR24

Ningbo SUPU Electronics Co., Ltd.

Address: No. 150, Xinxing 4th Road, High-tech Industrial Development Zone,  
Cixi City, Zhejiang Province, China

Zip code: 315303

Switchboard: +86 574-63288158

Fax: +86 574-63288170

E-mail:supucontact@supu.cn

Service Hotline: 400-626-6336



Wechat