





Product Type: Plug-in terminal-Plug

Product Name:MC-RJ3.5H04P-I-0001

Product Description: Pitch:3.5mm Rated Voltage : 160V Rated Current:8A Connection method : Push-in spring connection colour : customizable

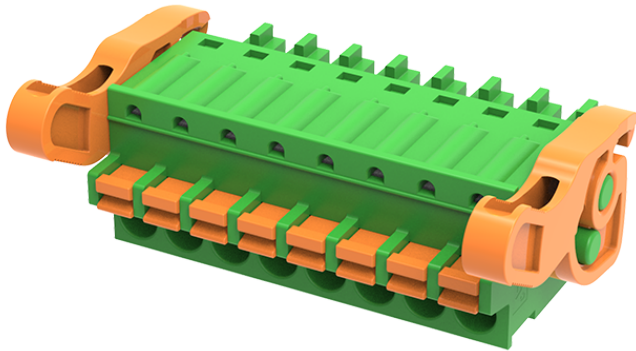

### Product Size

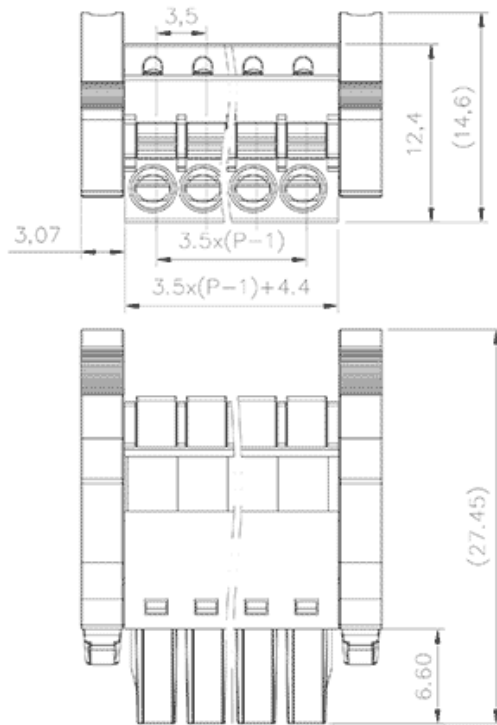

### Parameters

|   |                     |
|---|---------------------|
| <input checked="" type="checkbox"/> SUPU ID               | MC-RJ3.5H04P-I-0001 |
| <input checked="" type="checkbox"/> Pitch                 | 3.5                 |
| <input checked="" type="checkbox"/> Number of levels      | single layer        |
| <input checked="" type="checkbox"/> Number of connections | 4                   |

|   |                                  |
|---|----------------------------------|
| <input checked="" type="checkbox"/> Connection method           | Push in connection               |
| <input checked="" type="checkbox"/> Protection Level            | IP20                             |
| <input checked="" type="checkbox"/> Operating temperature range | -40~+105°C                       |
| <input checked="" type="checkbox"/> Insulation material         | PA66                             |
| <input checked="" type="checkbox"/> Insulation material group   | I                                |
| <input checked="" type="checkbox"/> Contact material            | Copper alloy                     |
| <input checked="" type="checkbox"/> Contact plating             | Sn,Plated                        |
| <input checked="" type="checkbox"/> Color                       | Green/Black/Blue/Grey/Orange/Red |

## Technical data

|   |                        |
|---|------------------------|
| <input checked="" type="checkbox"/> IEC Rated Current                             | 8A                     |
| <input checked="" type="checkbox"/> IEC Rated Voltage                             | 160V                   |
| <input checked="" type="checkbox"/> Overvoltage category                          | III/III/ II            |
| <input checked="" type="checkbox"/> Degree of pollution                           | 3 2 2                  |
| <input checked="" type="checkbox"/> Rated impulse voltage                         | 2.5KV 2.5KV2.5KV       |
| <input checked="" type="checkbox"/> UL Rated Current                              | 8A - -                 |
| <input checked="" type="checkbox"/> UL Rated Voltage                              | 300V - -               |
| <input checked="" type="checkbox"/> Conductor cross section rigid                 | 0.2-1.5mm <sup>2</sup> |
| <input checked="" type="checkbox"/> Conductor cross section flexible              | 0.2-1.5mm <sup>2</sup> |
| <input checked="" type="checkbox"/> Conductor cross section flexible,with ferrule | 0.2-1.5mm <sup>2</sup> |
| <input checked="" type="checkbox"/> Locking screw Specification                   | -                      |
| <input checked="" type="checkbox"/> Locking screw torque                          | -                      |
| <input checked="" type="checkbox"/> Fixed Screw Specification                     | -                      |
| <input checked="" type="checkbox"/> 固定螺钉扭矩  | -                      |

|  |          |
|--|----------|
| <input type="checkbox"/> Stripping length    | 8-9mm    |
| <input type="checkbox"/> Use group           | B/C/D    |
| <input type="checkbox"/> Rated cross section | 24~16AWG |

## Commercial data

|                                   |                     |
|-----------------------------------|---------------------|
| <input type="checkbox"/> Order No | MC-RJ3.5H04P-I-0001 |
|-----------------------------------|---------------------|

### Ningbo SUPU Electronics Co., Ltd.

Address: No. 150, Xinxing 4th Road, High-tech Industrial Development Zone,

Cixi City, Zhejiang Province, China

Zip code: 315303

Switchboard: +86 574-63288158

Fax: +86 574-63288170

E-mail:supucontact@supu.cn

Service Hotline: 400-626-6336



Wechat